




I SQUARED R ELEMENT COMPANY, INC.
 12600 Clarence Center Road
 Akron, NY 14001
 Phone (716) 542-5511 FAX (716) 542-2100




SEU SPECIFICATION SHEET

***Low-Resistance SEU

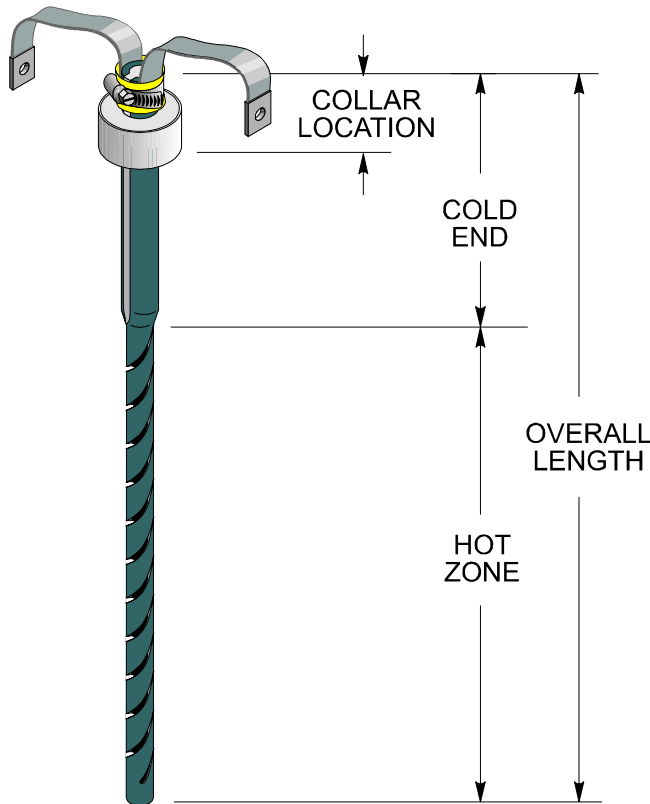

***High-Resistance SEU

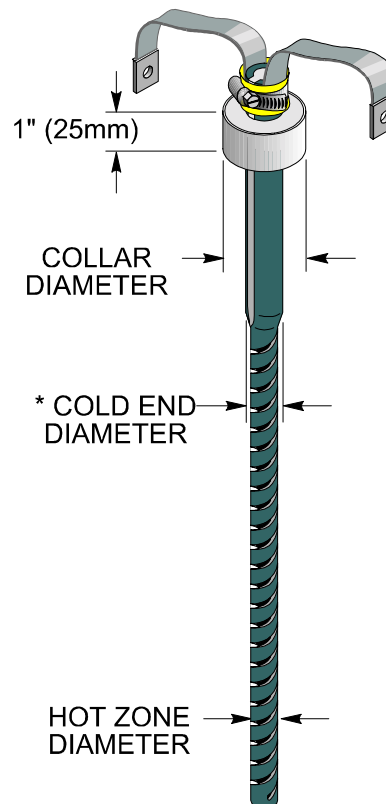

SEU Starbar Dimensions

Hot Zone Diameter		Cold End Diameter		Collar Diameter		** Collar Location		Strap Rating	Maximum Heating Length		Maximum Overall Length	
MM	Inch	MM	Inch	MM	Inch	MM	Inch	Amps	MM	Inch	MM	Inch
13	1/2	19	3/4	38	1-1/2	50	2	50	254	10	508	20
16	5/8	25	1	57	2-1/4	50	2	50	305	12	610	24
19	3/4	32	1-1/4	57	2-1/4	50	2	50	610	24	914	36
25	1	38	1-1/2	57	2-1/4	76	3	100	813	32	1168	46
32	1-1/4	54	2-1/8	76	3	76	3	100	1016	40	1829	72
38	1-1/2	60	2-3/8	76	3-3/4	76	3	100	1575	62	2311	91
45	1-3/4	67	2-5/8	76	3-3/4	76	3	200	1575	62	2311	91
54	2-1/8	70	2-3/4	76	3-3/4	76	3	200	1575	62	2311	91
70	2-3/4	70	2-3/4	95	3-3/4	95	4	400	1575	62	2311	91

The 2-3/4" (70mm) Starbar has equal cold end and hot zone diameters.

* Please contact us for maximum lengths available.

** Collar Location can be increased from the standards listed.

Strap information: The working length of the SEU strap is 10" (254mm).

The end clip hole diameter for 50 amp braid is 9/32" (7mm), 100 amp braid and over is 9/16" (14mm).

***The resistance of the SEU Starbar is dependent on the spiral. The more spiral turns, the higher the resistance.